




Daylight Harvesting Controls

Luxstat Day/Night Control Module with Clock

KEY FEATURES

- Open Loop ON/OFF daylight harvesting control
- Integrated clock for night blocking
- Pushbutton programming
- DIN rail mounting
- UL Listed
- 2-Year Warranty

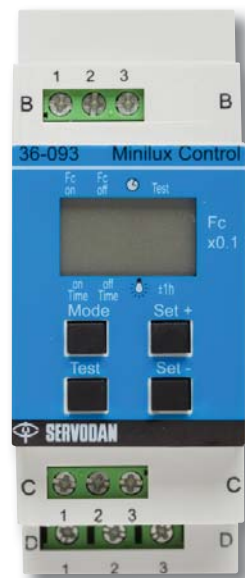

OVERVIEW

The Luxstat Day/Night Control Module by Servodan provides single zone ON/OFF daylight harvesting control utilizing a unique Open Loop control algorithm. In the evening, when daylight diminishes below the desired ON set point, the control module switches lighting on. In the morning, when daylight reaches the desired OFF set point, lighting is switched off. The controller's integrated clock function switches off lighting completely during a pre-defined period. Switching off lighting during the late evening/early morning means more energy savings. The controller also features pushbutton programming for easy system setup and configuration.

FEATURES and BENEFITS

Features

Open Loop ON/OFF daylight harvesting control

Integrated clock for night blocking

Pushbutton programming

Benefits

- System does not respond inappropriately to temporary changes in lighting (e.g. clouds passing by).

- Provides more energy savings by switching off lights completely during a pre-defined period.

- Easy system configuration and management

SPECIFICATIONS

Electrical (Input)

- LUXSTATDNM120: 120VAC
- LUXSTATDNM277: 277VAC
- Load: Max 40mA
- Power Consumption: Approximately 2W
- Signal from Light Sensor: 0-10V

Electrical (Output)

- Relay Contact: NO, m10A
- Load:
 - Incandescent Lamps – 1200W
 - Fluorescent – 620VA
 - Halogen Incandescent – 500W
- Secondary Voltage: 24VDC

Performance	<ul style="list-style-type: none"> • Fc Range: 0.3 – 30Fc • Adjustment range for Fc on: 1 – 30Fc
Adjustment range for Fc off:	<ul style="list-style-type: none"> • Minimum: 10% of Fc on, but not less than 0.3 Fc • Maximum: 70% of Fc on but not more than 9 Fc • Tolerance of Fc range: +-10% • Backup for clock: > 2 hours, when the unit has been connected at least 5 minutes
Operating Environment	<ul style="list-style-type: none"> • Temperature range: 41°F – 122°F (+5°C – +50°C)
Mounting	<ul style="list-style-type: none"> • DIN Rail
Accessories	<ul style="list-style-type: none"> • Outdoor Light Sensor – LUXSTATLSO
Certifications	<ul style="list-style-type: none"> • UL and CE Listed
Warranty	<ul style="list-style-type: none"> • 2 years

HOW TO ORDER

Catalog Number	Description
LUXSTATDNCM120	Luxstat Day/Night Control Module with Clock, 120VAC, DIN Rail Mount
LUXSTATDNCM277	Luxstat Day/Night Control Module with Clock, 277VAC, DIN Rail Mount



Building Automation, Inc.

Hubbell Building Automation, Inc.
 9601 Dessau Road | Building One | Austin, Texas 78754
 {512} 450-1100 | {512} 450-1215 fax
hubbell-automation.com