



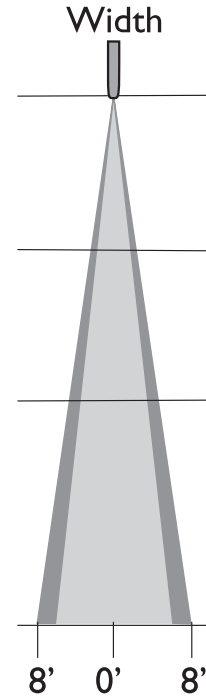



Building Automation, Inc.

LightBAT™ G2 LBLens10

Hubbell Building Automation, Inc.
9601 Dessau Road • Building One • Suite 100
Austin, Texas 78754
512-450-1100 • 512-450-1215 Fax
www.hubbell-automation.com

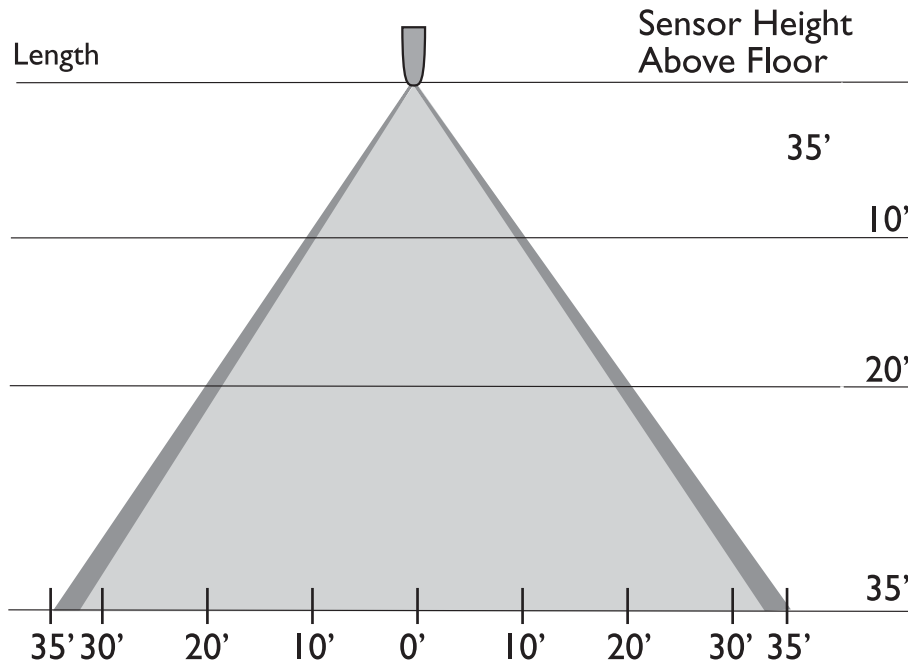


LB-Lens-10
1.0 x .23 Lens
Aisle lens 16' to 35' (maximum) mounting height

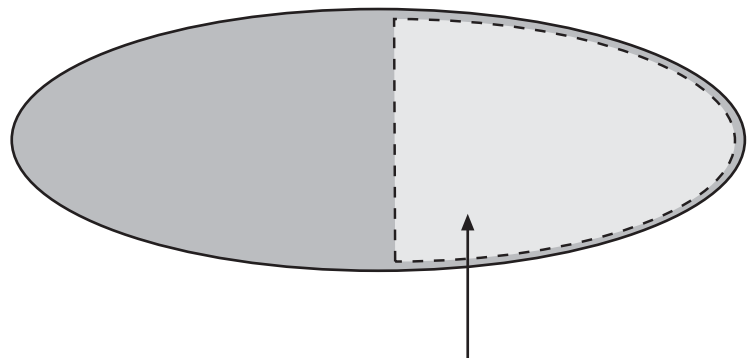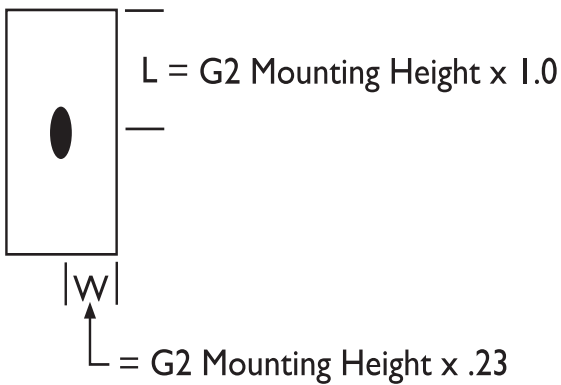


Adhesive-backed yellow mask (included with the lens) is attached to lens to block out areas of unwanted motion.

1/2 Range Pattern

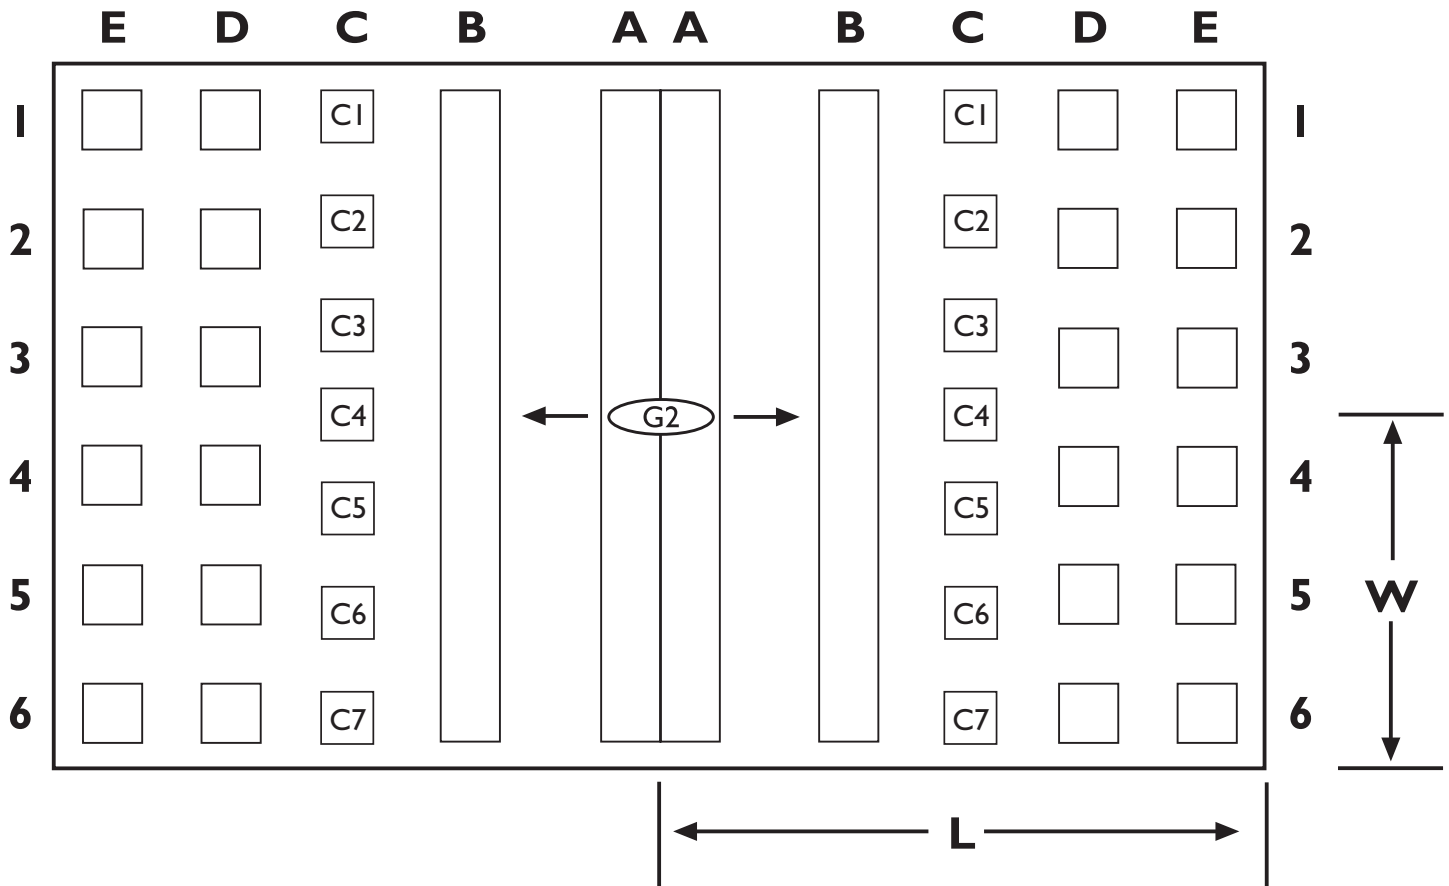

Mask out unwanted areas of motion by applying adhesive-backed yellow mask (included with the lens) to the external surface of the lens.

1. Select area to mask from the above diagram.
2. Select zones.
3. Place mask over lens facet and cut mask along illustrated lines, so that when applied to the lens, the mask will affect or “mask out” the correct areas.

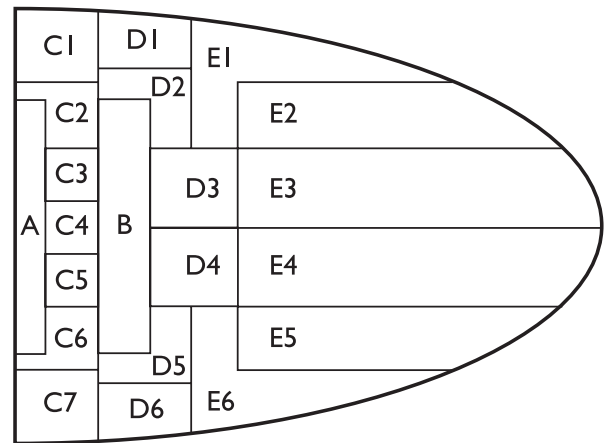

Lens Mask
1:1

Lens Facet Diagram



Building Automation, Inc.

Hubbell Building Automation, Inc.
9601 Dessau Road • Building One • Suite 100
Austin, Texas 78754
512-450-1100 • 512-450-1215 Fax
www.hubbell-automation.com